

Wire Guards

Protect your system clocks against accidental damage or vandalism with the wire guard accessory.

14131	Analog Wire Guard, for 12.5" (31.75cm) clocks (14" (35.56cm) square)
14123	Analog Wire Guard, for 16" (40.64cm) clocks (18" (45.72cm) square)
14388	Digital Wire Guard, 2.5" (6.35cm), 4- or 6-digit
14389	Digital Wire Guard, 4" (10.16cm), 4- or 6-digit



Digital Wire Guard

Clear Polycarbonate Digital Clock Guard

This durable, high impact guard is nearly indestructible while providing a clear viewing area. Used with the water resistant gasket, it is perfect for indoor pools and high humidity areas.

14453	Digital Clock Polycarb Guard, 2.5" (31.75cm), 4- or 6-digit
14455	Digital Clock Polycarb Guard, 4" (6.35cm), 4- or 6-digit

- * Add a "-1" after item number for the water resistant gasket (Example: 14453-1)
- * Polycarbonate guard is not shown



Analog Wire Guard

1-Watt Transmitter Rack

This sturdy steel rack mounts conveniently and securely to a wall to support a Primex Wireless Primary or Satellite 1-Watt Transmitter.

14005	1-Watt Transmitter Rack
-------	-------------------------



Transmitter Rack

Surge Protector

To protect your facility against power outages and other disruptions, Primex Wireless recommends a battery back-up system with surge protection for use with your Primary or Satellite Transmitter.

14196	Surge Protector and Battery Back-up System
-------	--



Surge Protector and Battery Back-up System

Additional Cable

14238	16.5' (8.44m) Remote Antenna Clock Cable
14013	50' (15.24m) GPS Receiver Cable
14014	100' (30.48m) GPS Receiver Cable
14015	200' (60.96m) GPS Receiver Cable
14015-1	200' (60.96m) Plenum Rated GPS Receiver Cable

- * Additional cable is not shown

Wire Guard Specifications:


- Constructed of steel with a zinc-plated finish
- Mounting screws included

Analog Wire Guards

- Dimensions:
 - 14" (35.56cm) square (12.5" (31.75cm) Clocks)
 - 18" (45.72cm) square (16" (40.64cm) Clocks)


Digital Wire Guards

- Dimensions:
 - 2.5" (6.35cm) Guard: 16.0"L (40.64cm) x 7.0"H (17.78cm) x 5.5"D (13.97cm)
 - Center hole openings: 2.75"L (6.99cm) x 2.75"W (6.99cm)
 - Edge hole openings: 2.75"L (6.99cm) x 1.5"H (3.81cm) x 4.25"D (10.8cm)
 - 4" (10.16cm) Guard: 25.0"L (63.5cm) x 9.8"H (24.9cm) x 4.4"D (11.2cm)
 - Center hole openings: 2.75"L (6.99cm) x 2.75"W (6.99cm)
 - Edge hole openings: 2.75"L (6.99cm) x 1.5"H (3.81cm) x 5.25"D (13.34cm)

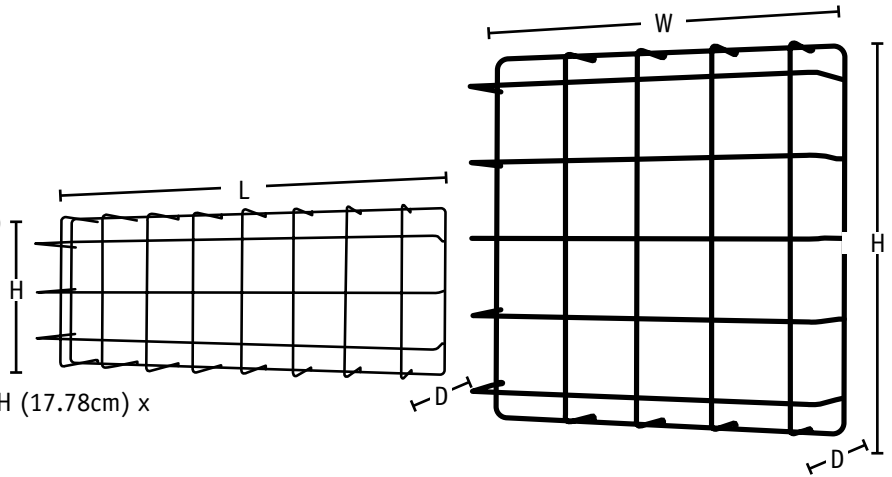


Clear Polycarbonate Digital Clock Guard Specifications:

- Constructed of a high impact polycarbonate
- Water resistant gasket available
- Dimensions:
 - 2.5" (6.35cm) Guard: 14.75"L (37.48cm) x 10.25"H (26.04cm) x 5.25"D (13.34cm)
 - 4" (10.16cm) Guard: 24.5"L (62.23cm) x 13.5"H (34.29cm) x 8"D (20.32cm)

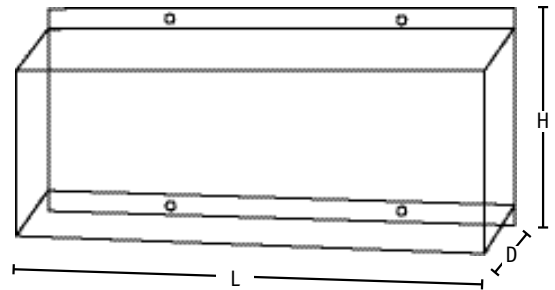

I-Watt Transmitter Rack Specifications:

- 18 GA metal
- Epoxy coated

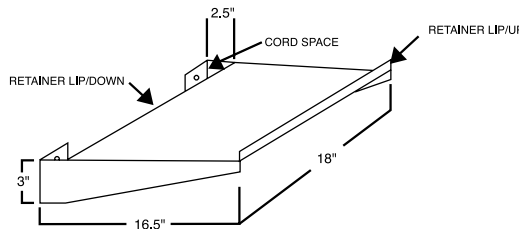

Surge Protector (minimum) Specifications:

Input: 120V
 Output: 120V
 Interface Port USB

Output:
 Output power capacity: 500VA
 Output power capacity: 300 Watts
 Nominal output voltage: 120V

Input:
 Nominal input voltage: 120V
 Input frequency: 60 Hz +/- 1 Hz
 Input connection type: NEMA 5-15P

Surge Protection and Filtering:
 Surge energy rating: 365 joules
 Dataline protection

Batteries:
 Battery type: Maintenance-free sealed Lead-Acid
 Battery with suspended electrolyte: leakproof

Conformance:
 Approvals: cUL Listed, UL Listed

Primex Wireless - Corporate Headquarters
 965 Wells Street
 Lake Geneva, WI 53147
 (800) 537-0464
www.primexwireless.com

Primex Wireless - Canada
 1310 Kerrisdale Blvd Unit #4
 Newmarket, Ontario L3Y 8V6
 (800) 330-1459
www.primexwireless.ca