

## Digital Series Clocks

Perfect for large rooms and hallways, the bright LED digits are viewable up to 150-feet away. These digital clocks are easy to install—simply connect the power source and the clock is instantly synchronized to the Primex Wireless System. Installation requires no manual adjustments. The control panel allows users to select alternating time and date options, P.M. time indication, and the ability to offset hours for different time zones. Digital clocks also feature a light on the face of the clock that indicates a received signal from the Primex Wireless transmitter.

### Single-Sided

14200	2.5" (6.35cm), 4-digit display, 120 VAC
14212	2.5" (6.35cm), 4-digit display, 120 VAC with 18" slope bracket
14414	2.5" (6.35cm), 4-digit display, 24 VAC
14416	2.5" (6.35cm), 4-digit display, 24 VAC with 18" slope bracket
14202	2.5" (6.35cm), 6-digit display, 120 VAC
14419	2.5" (6.35cm), 6-digit display, 120 VAC with 18" slope bracket
14417	2.5" (6.35cm), 6-digit display, 24 VAC
14420	2.5" (6.35cm), 6-digit display, 24 VAC with 18" slope bracket
14201	4" (10.16cm), 4-digit display, 120 VAC
14412	4" (10.16cm), 4-digit display, 24 VAC
14203	4" (10.16cm), 6-digit display, 120 VAC
14410	4" (10.16cm), 6-digit display, 24 VAC

### Dual-Sided

14425	2.5" (6.35cm), 4-digit display wall mount, 120 VAC
14426	2.5" (6.35cm), 4-digit display ceiling mount, 120 VAC
14433	2.5" (6.35cm), 4-digit display wall mount, 24 VAC
14435	2.5" (6.35cm), 4-digit display ceiling mount, 24 VAC
14431	2.5" (6.35cm), 6-digit display wall mount, 120 VAC
14432	2.5" (6.35cm), 6-digit display ceiling mount, 120 VAC
14435	2.5" (6.35cm), 6-digit display wall mount, 24 VAC
14436	2.5" (6.35cm), 6-digit display ceiling mount, 24 VAC
14423	4" (10.16cm), 4-digit display wall mount, 120 VAC
14424	4" (10.16cm), 4-digit display ceiling mount, 120 VAC
14437	4" (10.16cm), 4-digit display wall mount, 24 VAC
14438	4" (10.16cm), 4-digit display ceiling mount, 24 VAC

### Flush Mount

**Only available with an 18" cord**

14202F*	2.5" (6.35cm), 6-digit display flush mount, 120 VAC
14417F*	2.5" (6.35cm), 6-digit display flush mount, 24 VAC

\*Ships with silicone sealant to seal faceplate to wall (optional)

- Add a "G" after the item number for green LED models
- Add a "-1" after item number for 18" (45.72cm) cord option, only available on the 120 VAC models



Single-Sided 4-Digit



Single-Sided 6-Digit



Dual-Sided Ceiling Mounted



Dual-Sided Wall Mounted



Flush Mount

# Digital Clock Specifications:

- Highly visible 7-segment LED digits
- 12- or 24-hour time display
- Alternating time and date display option
- Operating temperature range: 0°-125°F (-18°-52°C)
- Storage temperature range: -20°-185° (-29°-85°C)

## Single-Sided Digital Clock (refer to Figure 1)

- Power Supply:
  - Input:
    - 120 VAC - 50-60 cycle, 9' (2.74m) cord (including plug)
    - 24 VAC - 50-60 cycle, 18" (45.72cm) cord (with pigtail)
- Dimensions:
  - 2.5" (6.35cm), 4-digit: 10.75"L (27.30cm) x 5.0"H (12.7cm) x 2.5"D (6.35cm)
  - 2.5" (6.35cm), 6-digit: 13.75"L (34.93cm) x 5.0"H (12.7cm) x 2.5"D (6.35cm)
  - 4" (10.16cm), 4-digit: 18.0"L (45.72cm) x 8.0"H (20.32cm) x 3.0"D (7.62cm)
  - 4" (10.16cm), 6-digit: 23.25"L (59.05cm) x 8.0"H (20.32cm) x 3.0"D (7.62cm)
- Weights:
  - 2.5" (6.35cm), 4-digit: 2.8 lbs (1.27kg)
  - 2.5" (6.35cm), 6-digit: 3.2 lbs. (1.45kg)
  - 4" (10.16cm), 4-digit: 5.2 lbs. (2.36kg)
  - 4", 6-digit: 6.5 lbs. (2.95kg)

## Flush Mount (refer to Figure 3)

- Power Supply:
  - Input: 120 VAC - 50-60 cycle, 18" (45.72cm) cord (with pigtail)
- Dimensions:
  - 2.5" (6.35cm), 6-digit: 17.0"L (43.18cm) x 6.3"H (16cm) x 0.3"D (.76cm) (2.8" (7.11cm) overall)
- Weight:
  - 2.5" (6.35cm), 6-digit: 5.0 lbs. (2.27kg)

## Dual-Sided Digital Clock (refer to Figure 2)

- Power Supply:
  - Input:
    - 120 VAC - 50-60 cycle, 9' (2.74m) cord (including plug)
    - 24 VAC - 50-60 cycle, 18" (45.72cm) cord (with pigtail)
- Dimensions:
  - 2.5" (6.35cm), 4-digit
    - Wall Mount: 13.7"L (34.93cm) x 5.6"H (14.23cm) x 6.8"D (17.27cm)
    - Ceiling Mount: 11.3"L (28.7cm) x 8.6"H (21.84cm) x 6.8"D (17.27cm)
  - 4" (10.16cm), 4-digit
    - Wall Mount: 22.1"L (56.13cm) x 8.7"H (22.1cm) x 8.5"D (21.59cm)
    - Ceiling Mount: 18.7"L (47.5cm) x 12.1"H (30.73cm) x 8.5"D (21.59cm)
  - 2.5" (6.35cm), 6-digit
    - Wall Mount: 17.4"L (44.2cm) x 5.6"H (14.23cm) x 6.8"D (17.27cm)
    - Ceiling Mount: 14.3"L (36.32cm) x 8.6"H (21.84cm) x 6.8"D (17.27cm)
- Weights:
  - 2.5" (6.35cm), 4-digit: 8.0 lbs. (3.63kg)
  - 4" (10.16cm), 4-digit: 17.0 lbs. (7.71kg)
  - 2.5" (6.35cm), 6-digit Display: 9.1 lbs. (4.13kg)

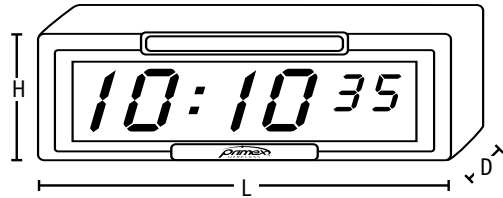


Figure 1

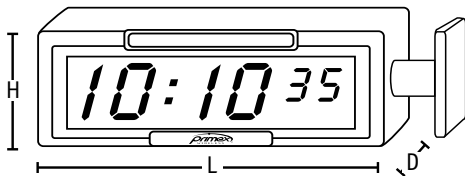


Figure 2

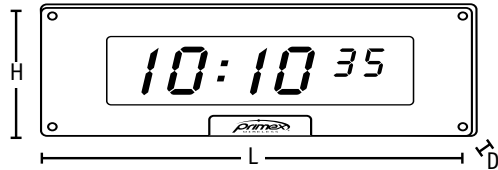


Figure 3

Primex Wireless - Corporate Headquarters  
 965 Wells Street  
 Lake Geneva, WI 53147  
 (800) 537-0464  
[www.primexwireless.com](http://www.primexwireless.com)

Primex Wireless - Canada  
 1310 Kerrisdale Blvd Unit #4  
 Newmarket, Ontario L3Y 8V6  
 (800) 330-1459  
[www.primexwireless.ca](http://www.primexwireless.ca)