

Traditional Series Clocks

Our traditional Series Clocks are ideal for many applications with easy to read dials and durable polycarbonate frames and lenses. We offer a variety of clock styles, colors, sizes and dial options. A water resistant model is available for environments with high moisture and humidity. The splash-proof back plate resists water in places such as pools and food processing areas.

Battery Operated Models

14280	9" (22.86cm) Black
14155	12.5" (31.75cm) Black
14157	12.5" (31.75cm) Taupe
14159	12.5" (31.75cm) White
14164	12.5" (31.75cm) Black, Dual-Sided
14166	12.5" (31.75cm) Taupe, Dual-Sided
14168	12.5" (31.75cm) White, Dual-Sided
14163	16" (40.64cm) Black

Water Resistant Battery Operated Models

14240	12.5" (31.75cm) Black, Water Resistant
14241	12.5" (31.75cm) Taupe, Water Resistant
14243	12.5" (31.75cm) White, Water Resistant

Electric Models

14323	12.5" (31.75cm) 24VAC Black
14306	12.5" (31.75cm) 120VAC Black
14338	16" (40.64cm) 24VAC Black
14339	16" (40.64cm) 120VAC Black

Electric Dual-Sided Models

14330	12.5" (31.75cm) 120VAC Black, wall
14331	12.5" (31.75cm) 120VAC Black, ceiling
14332	12.5" (31.75cm) 24VAC Black, wall
14333	12.5" (31.75cm) 24VAC Black, ceiling
14326	12.5" (31.75cm) 120VAC Taupe, wall
14327	12.5" (31.75cm) 120VAC Taupe, ceiling
14328	12.5" (31.75cm) 24VAC Taupe, wall
14329	12.5" (31.75cm) 24VAC Taupe, ceiling
14349	12.5" (31.75cm) 120VAC White, wall
14348	12.5" (31.75cm) 120VAC White, ceiling
14350	12.5" (31.75cm) 24VAC White, wall
14351	12.5" (31.75cm) 24VAC White, ceiling



Dual-Sided Wall Mounted



12.5" (31.75cm) and 16" (40.64cm)



9" (22.86cm)

Customize me!

Available Frame Colors



Black Taupe White

Remote Antenna Clock

The remote antenna clock is great for use in rooms with sensitive instruments that are shielded from radio frequencies. In such instances, the clock can be installed inside the room, and connected by a shielded cable with an antenna that is located outside the RF-shielded area.

Battery Operated Model

14244	12.5" (31.75cm) Remote Antenna Clock
-------	--------------------------------------



Remote Antenna Clock

Clock Specifications:

Traditional Series Models

- High impact polycarbonate frame and lens
- Automatically adjusts for Daylight Saving Time
- Minimum battery life of 5 years
 - Batteries not included
 - 9" (22.86cm) models require two C cell batteries
 - 12.5" (31.75cm) models require two D cell batteries- Lithium battery pack available for an additional cost, order part #14885
 - 16" (40.64cm) models requires two D cell batteries- Lithium battery pack available for an additional cost, order part #14885
- Operating range: 32° - 158°F (0° - 70°C)
- Clock Lock available on all 12.5" (31.75cm) and 9" (22.86cm) models
The Clock Lock features two uniquely shaped hangers that require a sequence of movements to install and remove the clock.

Electric Models Power Supply

Input	24VAC	120VAC
Current Draw	.21AMPS	25mA
Cord Details	18" (45.72cm) pigtail	18" (45.72cm) two-prong

Dual Sided Models (refer to Figure 1)


- Wall or ceiling mount
- Provides easy viewing for hallway applications
- Easy to assemble

Water Resistant Models

- Suitable cleaning solutions include water or diluted alcohols.

Remote Antenna Clock

- Antenna: 12.4"L (31.5cm) mounted on a 15' (4.57m) cord

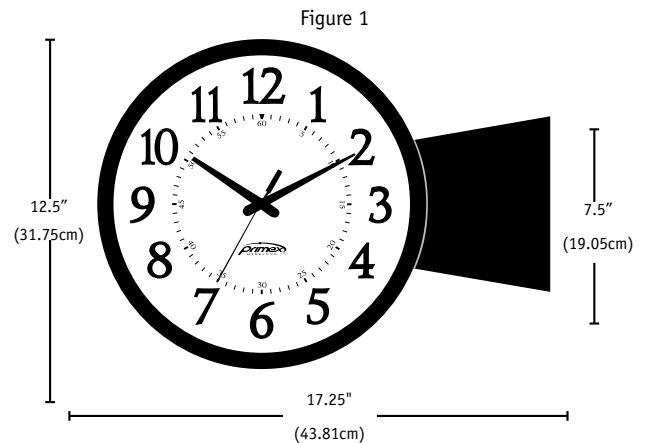

Primex Wireless - Corporate Headquarters
 965 Wells Street
 Lake Geneva, WI 53147
 (800) 537-0464
www.primexwireless.com

Primex Wireless – Canada
 1310 Kerrisdale Blvd Unit #4
 Newmarket, Ontario L3Y 8V6
 (800) 330-1459
www.primexwireless.ca